
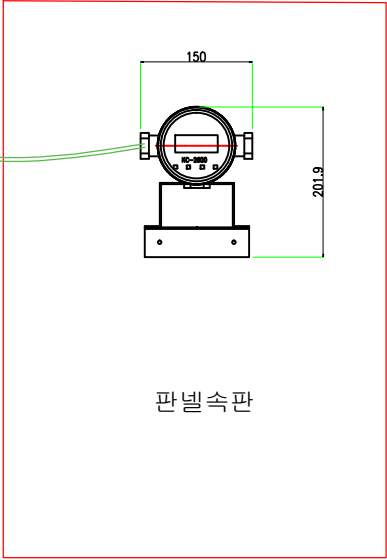
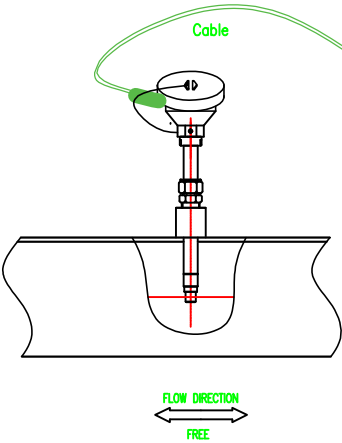


Tag No.	
Flow	MAX
	MIN 0 Nm ³ /h
Temp.	OPER. 40°C
	MAX 50 °C
Press.	OPER. 0.6Kgf/cm ²
	MAX 3Kgf/cm ²
Fluid	Air
Pipe Size	
Mounting	3/4"(20A)
Accuracy	±0.5 FS
Output	4~20mA, 4 wire
POWER	24VDC
ENCLOSURE	IP 67
Cable Length	10 M
Q'ty	1 sets

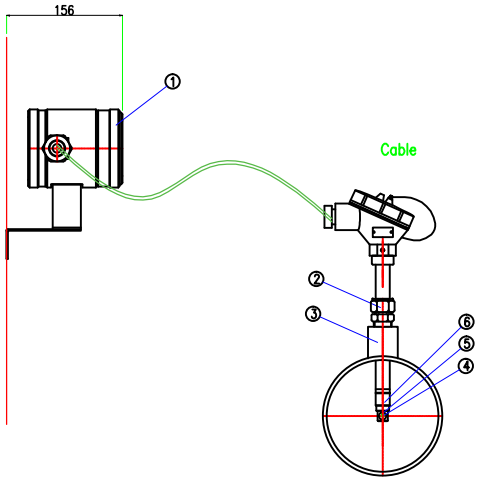

7			
6	SENSING PROTECTION	SUS 303	-
5	HEATER	Ceramic+SUS303	-
4	RTD	Ceramic+SUS303	-
3	NIPPLE	SUS 304	3/4"(PT)
2	COMPRESSION FITTING	SUS 316	3/4"(NPT)
1	HEAD	AL.C	
NO.	DESCRIPTION	MAT'L	REMARK
<div> <div> Golden Rules Co.,Ltd </div> <div> SCALE N/S UNIT mm REV. </div> </div> <div> <div> TITLE THERMAL MASS FLOW METER (KC-2610GI-R)Insertion & Remote Type </div> <div> PROJECT </div> </div> <div> DESIGNED BY CHECKED BY APPROVED BY </div> <div> DRAWING NO. KC-2610GI-R DATE 2015.02.09 SHEET NO. 1 </div>			