


40A

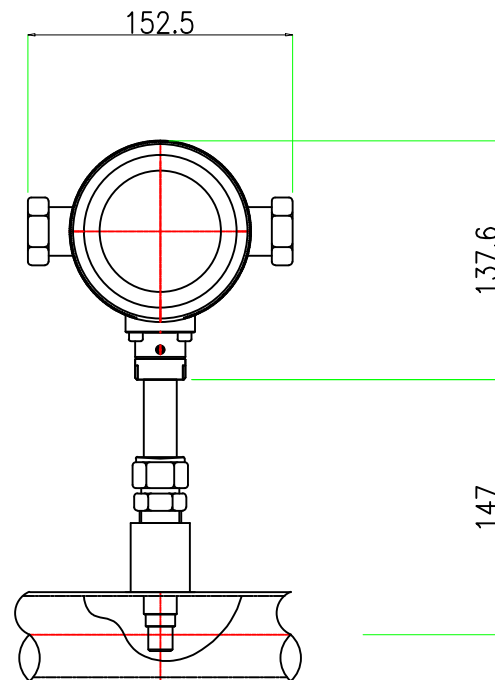

FLOW DIRECTION

FREE

Tag No.		
Flow	OPER	
	MAX	
Temp.	OPER.	
	MAX	150 °C
Press.	OPER.	
	MAX	10Bar
Fluid		N2
Pipe Size		40A
Connection		JIS 10K RF
Accuracy		±0.5 FS
Output		4–20mA, Pulse RS-485
POWER		24VDC
ENCLOSURE		IP 67
Q'ty		3 set

7			
6	SENSING PROTECTION	SUS 304	-
5	HEATER	Ceramic+SUS303	-
4	RTD	Ceramic+SUS303	-
3	NIPPLE	SUS 316	3/4"(PT)
2	COMPRESSION FITTING	SUS 316	3/4"(PT)
1	HEAD	AL.C	
NO.	DESCRIPTION	MAT'L	REMARK
		Golden Rules Co.,Ltd	SCALE N/S UNIT mm REV. △
TITLE		PROJECT	
THERMAL MASS FLOW METER		DRAWING NO. KC-2610-07-2	
(KC-2610GI) Insertion & Integral Type		SHEET NO. 1/1	
DESIGNED BY	CHECKED BY	APPROVED BY	DATE
Y.J. Lee	H.M. Hong	H.M. Hong	2018.07.10