


FLOW DIRECTION

 FREE

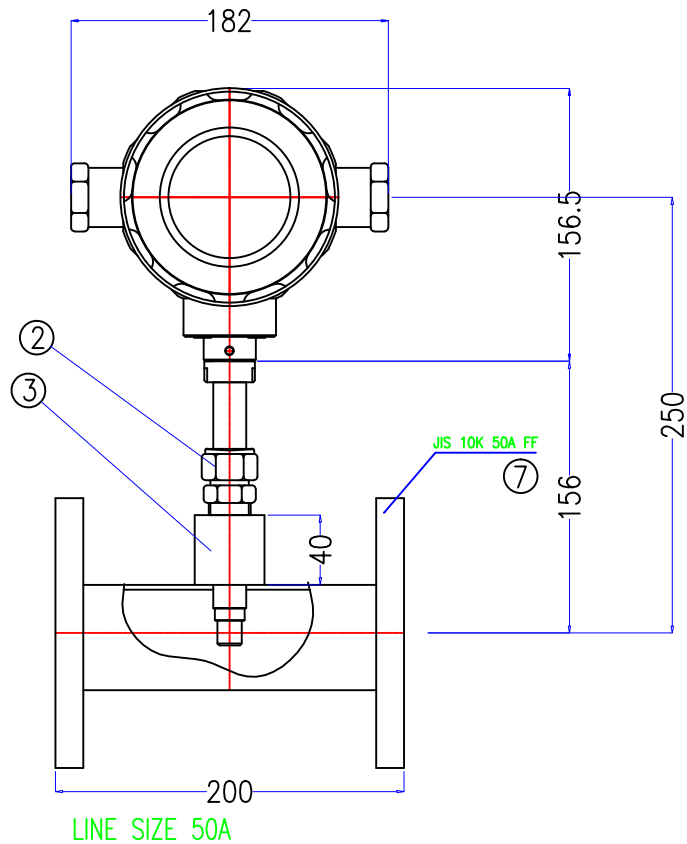

Tag No.	FT-H1 2DECB	
Flow Rate	NOR	80 Nm ³ /h
	MAX	250 Nm ³ /h
Temp.	NOR	30°C
	MAX	50°C
Press.	NOR	150 mmH ₂ O
	MAX	250 mmH ₂ O
Fluid	Air	
LINE Size	50A	
Q' TY	1 Set	
NIPPLE SIZE	NPT 3/4"	
Accuracy	±0.5 FS	
Output SIGNAL	4-20mA, PULSE RS-485	
POWER SUPPLY	24VDC	
ENCLOSURE	Ex d(ib) IIC T4	

NO.	DESCRIPTION	MAT'L	REMARK
7	FLOW BODY & FLANGE	SUS 304	
6	SENSING PROTECTION	SUS 303	-
5	HEATER	Ceramic+SUS303	-
4	RTD	Ceramic+SUS303	-
3	NIPPLE	SUS 304	3/4"(NPT)
2	COMPRESSION FITTING	SUS 316	3/4"(NPT)
1	HEAD	ALC	

NO.	DATE	REVISION	REV'D BY	CHK'D BY	 Golden Rules Co.,Ltd TITLE THERMAL MASS FLOW METER (KC-2620-EX) Inline & Integral Type	DESIGNED BY	CHECKED BY	APPROVED BY	SCALE	UNIT	REV.
△	.	.							N/S	mm	△
△	.	.									
△	.	.									
△	.	.									
△	.	.									
△	.	.									
									PROJECT	Samsung Electronic	
									DRAWING NO.	KC-2620-02-1	
									DATE	2015.01.28	SHEET NO. 1/1