
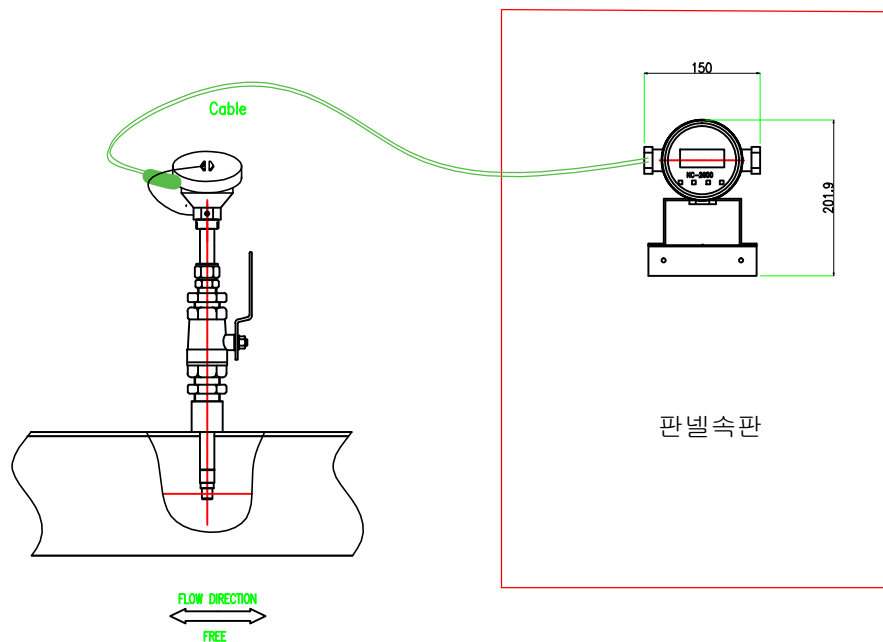


Tag No.		
Flow	MAX	2,075Nm ³ /h
	MIN	0 Nm ³ /h
Temp.	OPER.	40°C
	MAX	50 °C
Press.	OPER.	0.6Kgf/cm ²
	MAX	3Kgf/cm ²
Fluid	Air	
Pipe Size	100A	
Mounting	PT 1"(33.4mm)	
Accuracy	±0.5 FS	
Output	4~20mA, 4 wire	
POWER	24VDC	
ENCLOSURE	IP 67	
Cable Length	10 M	
Q'ty	1 sets	

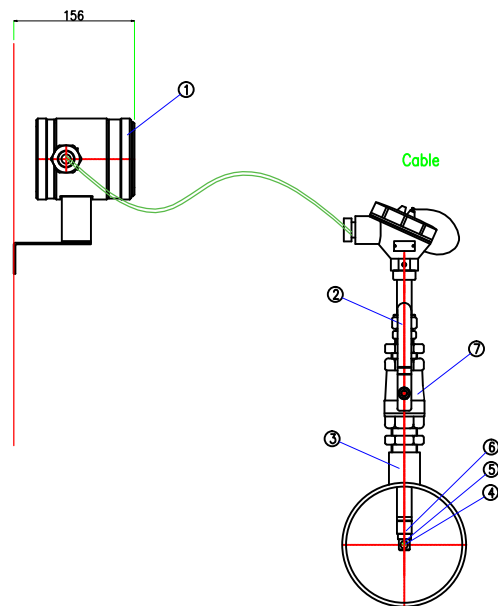

7	BALL VALVE	SUS304	1"(PT)
6	SENSING PROTECTION	SUS 303	-
5	HEATER	Ceramic+SUS303	-
4	RTD	Ceramic+SUS303	-
3	NIPPLE	SUS 304	1"(PT)
2	COMPRESSION FITTING	SUS 316	3/4"(NPT)
1	HEAD	ALC	
NO.	DESCRIPTION	MAT'L	REMARK
<div> <div> Golden Rules Co.,Ltd </div> <div> SCALE N/S </div> <div> UNIT mm </div> <div> REV. </div> </div>			
<div> <div> THERMAL MASS FLOW METER (KC-2610GI-R)Insertion & Remote Type </div> <div> DRAWING NO. KC-2610GI-R </div> </div>			
DESIGNED BY	CHECKED BY	APPROVED BY	DATE 2015.02.09